



New!!!




D50S

Simplicity and efficiency



1986



RS232 


- 2 capacitive Sylvac probe inputs
- Wide luminous display at the tenth of a micron
- User friendly: 1 key = 1 function
- RS232-C output
- Pre-programmed probes combinations



New!!!

D50S, **804.1050**


Measuring possibilities :

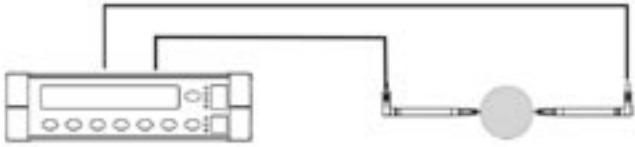



Channel 1 + 2



Channel 1 - 2

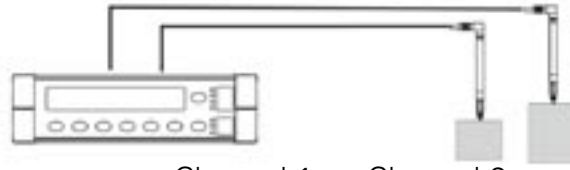

Channel 1 ou Channel 2

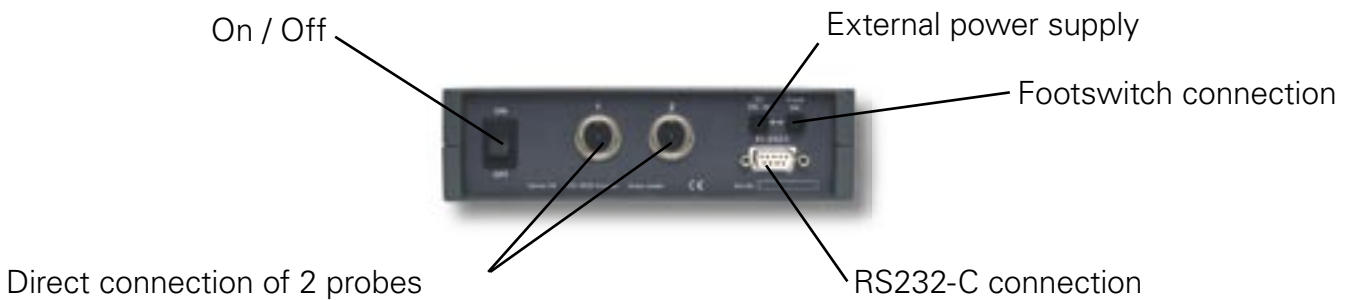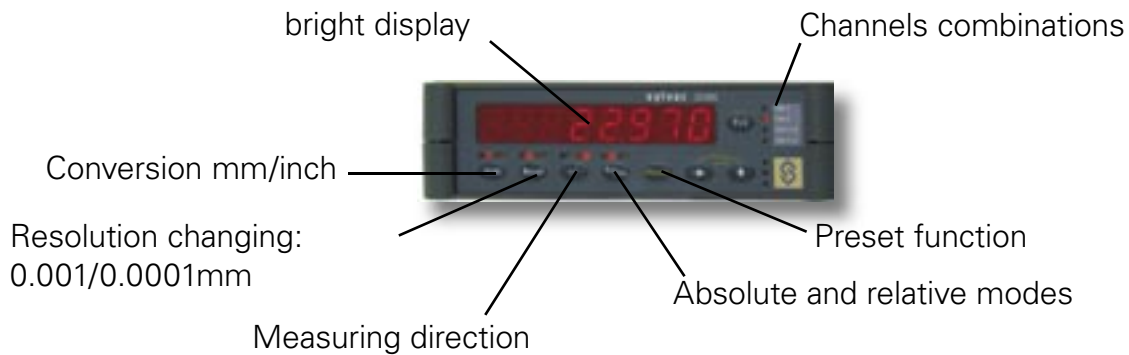

Changes without prior notice
represented by:



SYLVAC SA CP Ch. du Cloalet 16 CH-1023-Crissier

Tél: +41 (0) 21 637 67 57 Fax: +41 (0) 21 637 67 40

E-mail: sales@sylvac.ch

Web: www.sylvac.ch