

Sylvac Calitrace Multipurpose Gauge


The ingenious Calitrace gauge has many useful applications including scribing, inside outside and depth gauging. Rapid bore centre-line measurement can be achieved by the fitting of optional cones, external and internal measurement of grooves can be made with the use of groove anvils.



Features

- 0.01mm / 0.0005" resolution
- Measuring range 150mm, 200mm, 300mm, 600mm, 1000mm
- Repeatability 0.01mm / 0.0004" (+/-2s)
- RS-232 output
- Large LCD display

Options

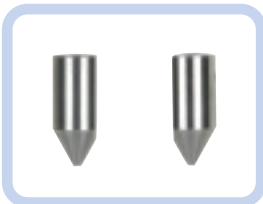

- Cone set 14mm diameter

Code: 30-911-2307 £65.00 Q



- Pair of holders for M2.5 thread (does not include anvils) 30 mm length

Code: 30-911-2308 £50.00 Q


- 60 mm length

Code: 30-911-2309 £93.00 Q

SPECIFICATION

Range	Accuracy	Repeatability	Beam	Code No	Price (£)
150mm / 6"	30µm / 0.0012"	10µm / 0.0004"	Half moon beam	30-910-1600	£266.00 Q
300mm / 12"	40µm / 0.0016"	10µm / 0.0004"	Half moon beam	30-910-1601	£307.00 Q
600mm / 24"	50µm / 0.002"	10µm / 0.0004"	Half moon beam	30-910-1602	£373.00 Q
600mm / 24"	60µm / 0.0024"	10µm / 0.0004"	UL111 beam	30-910-1606	£625.00 Q
1000mm / 40"	70µm / 0.003"	10µm / 0.0004"	UL111 beam	30-910-1610	£698.00 Q


Scribing

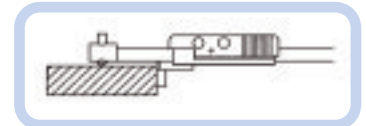


Outside Diameter




Inside Diameter

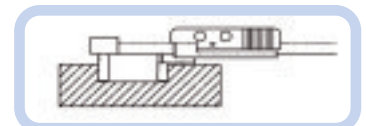

Depth

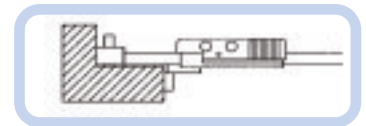

Centreline Distances

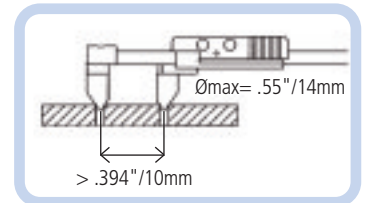

External & Internal Grooves

